

PPS Series

PPS 1615

147 l/m
38.8 USGPM

max 40 BAR
580 P.S.I.

APPLICAZIONI - APPLICATIONS



SPRAYER
SPRAYER



SERRE
GREENHOUSES



DISINFESTAZIONE
DISINFESTATION




ATOMIZZATORI
ATOMIZERS

MEMBRANE - MEMBRANES



DESMOFAN
DURAMAX
HPS
VITON

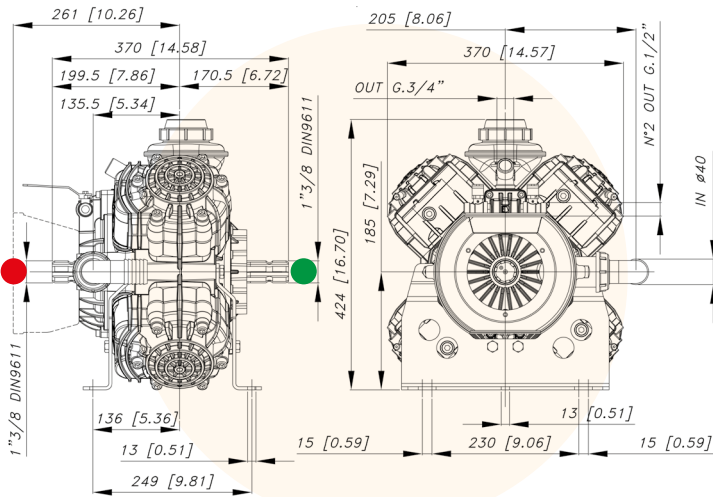

CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.		TABELLA RENDIMENTI PERFORMANCE CHART								
Potenza - Power	11,2 KW	14.9 HP	g/min R.P.M.	400		450		500		550	
Peso - Weight	30 Kg	66 lb	BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
IN	Ø 40 mm	Ø 1" 9/16 in	2	106,9	0,4	120,3	0,5	133,6	0,5	147,0	0,6
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.	29	28,2	0,6	31,8	0,6	35,3	0,7	38,8	0,8
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)	20	105,5	4,1	118,6	4,7	131,8	5,2	145,0	5,7
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.	290	27,9	5,5	31,3	6,2	34,8	6,9	38,3	7,6
OUT	G 3/4		30	104,7	6,2	117,8	6,9	130,9	7,7	144,0	8,5
Max. Temperatura - Max. Temperature	60 °C	140 °F	435	27,7	8,2	31,1	9,3	34,6	10,3	38,0	11,3
Tipo olio - Oil type	SAE 30		40	103,3	8,1	116,2	9,1	129,1	10,1	142,0	11,2
Capacità olio - Oil capacity	2,52 lt	0.66 U.S.G.	580	27,3	10,8	30,7	12,2	34,1	13,5	37,5	14,9

Versioni Versions

